RIPPA®

RS06

SKID STEER LOADER



EXCELLENT PERFORMANCE FULLY MEET THE NEEDS OF VARIOUS USERS.



EXCELLENT BASIC PERFORMANCE

ENGINE

Compact structure and powerful performance design. The engine adopts Kubota engine. At the same time, low Low fuel consumption, small vibration, low noise and consider. The environment has reached a high level.



POWERED BY Kubota

[SPEED MODE ADJUSTMENT]
(standard configuration)

When working, just push the pull rod, the engine speed will automatically adjust the speed, and adjust the speed gear according to the working mode to make the work more humanized.



[PILOT OPERATING HANDLE]

It adopts pilot handle operation, which saves effort during work, operates more smoothly and is more efficient. It has the characteristics of strong maneuverability, fast construction speed, strong adaptability and good reliability, and is mostly used in working situations under various terrain conditions.



RS06 SKID STEER LOADER

Various accessories such as hammers, rippers, timber grabs, and rakes can be added to meet more job requirements.

Quick change can be convenient and quick to replace the auxiliary equipment.



The operating handle adopts pilot operation, making the work more precise and the movement smoother.

Detachable inspection panel is convenient for inspection and inspection of sprockets and travel motors can be more rigorous.

The engine adopts the big brand Briggs & Stratton twin-cylinder engine.

There are anti-skid stickers on the pedals to prevent slipping when operating the machine.

Both the wheel type and the crawler type adopt chain transmission (four driving forces), so that the transmission efficiency is higher

REPLACE ASSISTIVE DEVICEMODE (standard configuration)

When replacing auxiliary equipment such as hydraulic quick changers,breakers, and wood grabbers, you can easily replace them by pressingthe button, which is convenient and quick.



MORE ACCESSORIES



Trencher



Grass Clip



Snow Blade



Grapple



Digger



Auger



Pallet Fork



Rock Bucket



Hydraulic breaker



Rotary drill



Angle Broom



Standard Bucket



4in 1 Bucket



Pile Driver



Fork Clamp



Ditch Compactor

SHOW MORE DETAILS





LED lights

The headlights are made of LED, which makes the vision clearer at night and increases work efficiency.



Pilot operating handle

Pilot handle operation makes the operation more labor-saving, smoother and more efficient during work.



Oil cylinder

Inverting the cylinder can effectively protect the cylinder rod from damage and extend the service life of the cylinder.



Track

Made of thickened wear-resistant rubber, it makes the machine more stable and safer when walking.



◆ The whole machine is small in size and strong in maneuverability

◆ In-situ steering can be achieved, making it easier to shuttle around crowded construction sites and construction sites;

◆ Enlarged and thickened bucket, not easy to corrode and rust, can quickly replace auxiliary tools, widely used and easy to operate;


◆ Big factory brand engine, strong power, stable operation, time-saving and labor-saving;

◆ The skid steer loader can be lifted to a high place with a crane, such as when building a building.



DETAILED PARAMETER CONFIGURATION

Envelope diagram

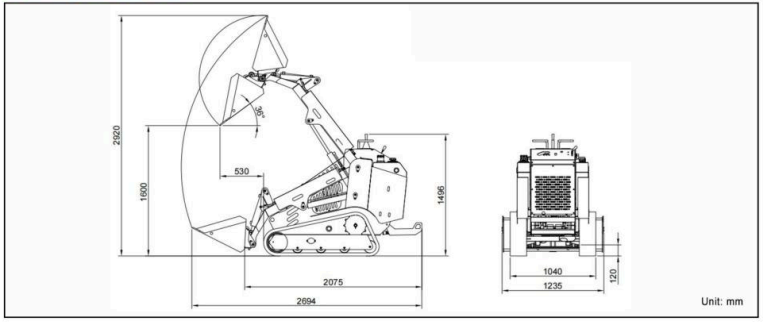

Product parameter

Basic performance parameter

Machine working weight	1201kg	2642lb
Bucket capacity	0.2m³	7.1ft³
Rated load mass (safe load)	325kg	715lb
Maximum load mass	650kg	1430lb
Travel speed low/high speed	0-5km/h	0-3.1mph
Gradeability	30%	30%
Ground pressure	43.6kpa	6.32psi
Maximum unloading height	1600mm	63in
Maximum loading height	2580mm	101.6in
Maximum unloading distance	586mm	23.1in
Minimum ground clearance	176mm	6.9in

Body

Transport length - with bucket (mm)	2792mm	110in
Transport length - without bucket (mm)	2150mm	84.6in
Transport width (mm)	1150mm	45.3in
Transport height (mm)	1522mm	59.9in
Bucket width (mm)	1150mm	45.3in

POWERED BY

Kubota



ENGINE MODEL ——*D1105*

18.4 kw/3000rpm

Engine

Engine brand	Kubota	Kubota
Engine model	D1105	D1105
Maximum horsepower	25ps	24.7hp
Maximum power	18.4kw	18.4kw
Maximum speed	3000rpm	3000rpm
Displacement	1.123L	0.297gal
Number of cylinders	3	3
Cooling method	Water-cooled	Water-cooled
Engine oil change amount	4L	1.057gal
Fuel form	Diesel	Diesel
Fuel grade	0/-10	0/-10
Theoretical fuel consumption	1.3-1.5	0.211-0.317gal

Hydraulic system

Main pump type/model	Plunger pump TFA10VO28LADS-53R
Main pump brand	Taifeng
Multi-way valve brand	Taifeng load-sensitive multi-way valve
Travel hydraulic motor type	Hengli BMER-400
Travel motor brand	Hengli

WE ARE RIPPA

Shandong Rippa Machinery Group Co., Ltd. is located in the Sixth Industrial Park, Jining high tech Zone, Shandong Province. It is a state-level high-tech enterprise with the right to import and export;

The company's staff are vigorous and enterprising, and constantly create the legend and glory of the rippa!



RIPPA®

Shandong Rippa Machinery Group Co., Ltd.

Add: Rippa Group Co., Ltd., Guang'an Road, High-tech Zone, Jining City, Shandong Province

www.rippa.com

Some specifications are based on engineering measurements and may deviate from actual conditions. Specifications are for comparison purposes only and are subject to change without notice. Specifications of individual RIPPA equipment will vary based on normal variations in design, manufacturing, operating conditions and other factors. Some pictures of RIPPA equipment are not limited to standard packages.